


Model No:M60L-1224-4

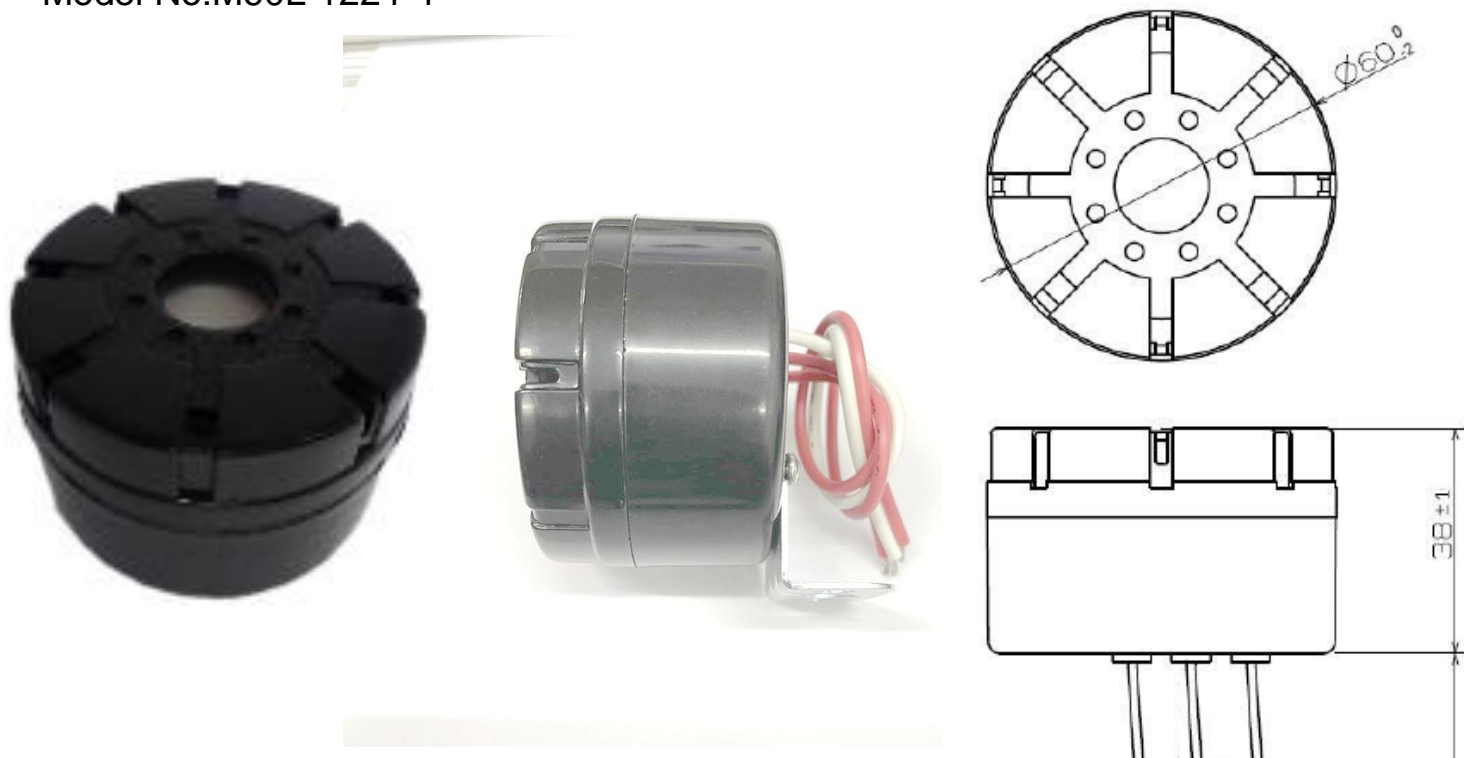

CHARACTERISTICS OF MODEL NOLM60L-1224-4

Operation Voltage	12~24 VDC(Typical)
Operation Current	<60 mA
Sound	Single
S.P.L	95 ± 5 dB(at 1.5 Meter)
Operation Frequency	2.5 ± 0.5 KHz
Continue Operation Test	Over 4 hours (at DC-24V)
Housing Material	ABS
Operating temperature	-10°C Min to +60°C Max
Storage temperature	-15°C Min to +65°C Max
Features	<ul style="list-style-type: none"> ●Easy install with a steady ●With reverse polarity protection
User	<ul style="list-style-type: none"> ●General bus and truck buzzer ●Electric bus and truck buzzer